


BLRGB PLUS

BLCOL0300024DC07254RGB000C05

Article no.: 100988

BILTON

FOCUSED
ON
LINEAR
LIGHT

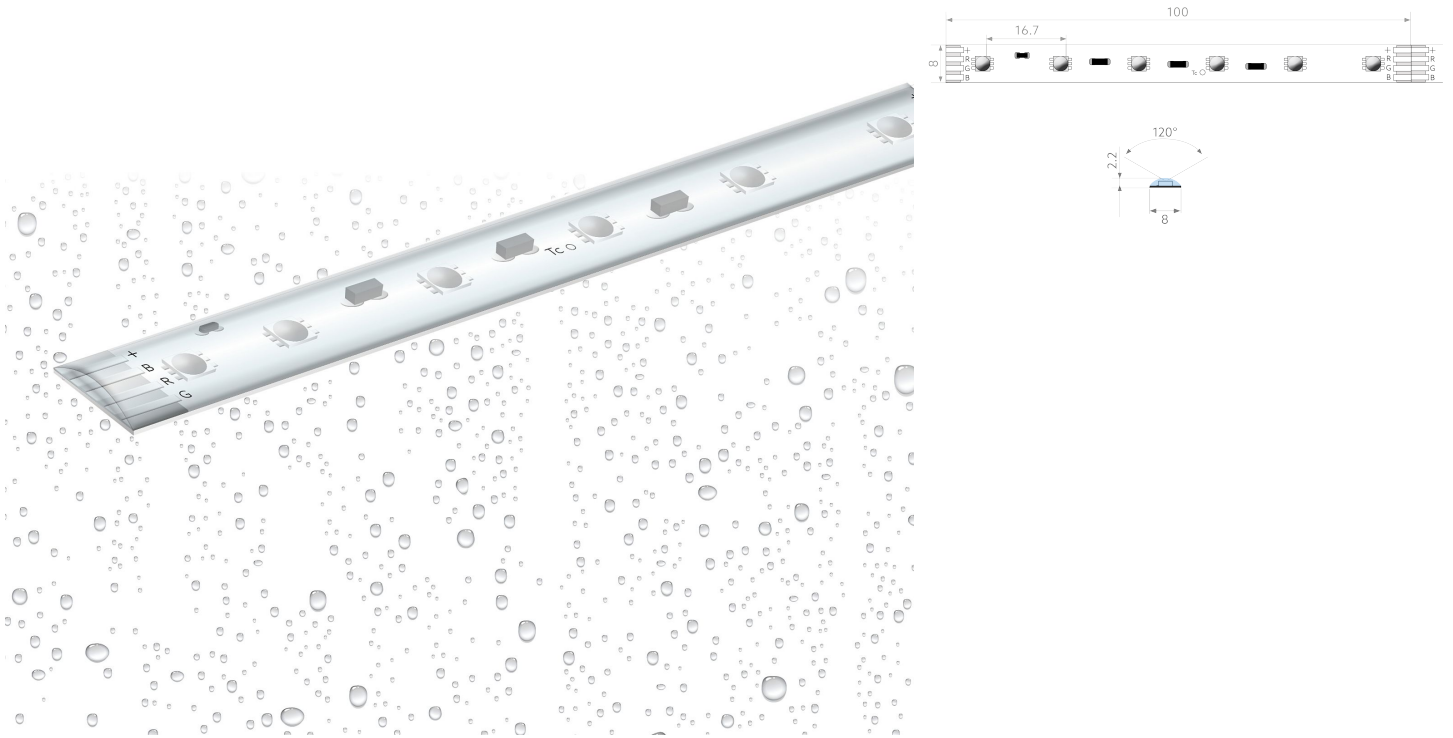

24
V

Lamp voltage

300
lm

Luminous flux per meter

5000.0
mm

Max. length

None


Colour rendering index CRI

TENDER TEXT

BILTONCOLOR 300 LED strip 24VDC 7,2W/m IP54 RGB COLOR 5m LED module BLRGB PLUS Article 100988 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 36000 h . The BLRGB PLUS LED-strip has a luminous flux of 300 lm at 7.2 W, resulting in an efficiency of 42 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 5000.0 mm can be achieved. In terms of lighting, the module has a colour temperature of RGB and a beam angle of 120°. All this with a colour rendering index of None and a Binning selection based on (MacAdams). The light strip can be separated every 100.0 mm, resulting in a LED distance of 16.70 mm. Degree of protection IP54 Dimension (L x W x H): 5000.0 mm x 8.0 mm x 2.2 mm

TOP-FEATURES

- //_ Protection class IP54 # for applications with increased requirements against splash water
- //_ Developed and produced by BILTON
- //_ With PU components from Germany
- //_ Increased module lengths due to the layout with double tracks



BLRGB PLUS

BLCOL0300024DC07254RGB000C05

Article no.: 100988

BILTON

FOCUSED
ON
LINEAR
LIGHT

MECHANICAL DATA

Net width [mm]	8.0
Net height [mm]	2.2
Net length [mm]	5000.0
Degree of protection (IP)	IP54
Colour	RGB
Net weight [g]	150
Distance [mm]	16.70
Distance relating to	LED to LED
Length of particular segments [mm]	100.0

ELECTRICAL DATA

Overall efficiency [lm/W]	42
Lamp power per meter [W]	7.2
Lamp voltage [V]	24
Voltage type	DC
Protection class	III

LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	300
Beam angle [°]	120
Colour rendering index CRI	None
Colour temperature [K]	RGB
Energy efficiency class provided exchangeable built-in lamp	B

CONNECTION

Number of poles	4
Conductor cross section [mm ²]	0.50
Max. length [mm]	5000.0

TEMPERATURE TECHNICAL DATA

Rated life time L70/B10 at 25 °C [h]	36000
Ambient temperature during operating [°C]	- 20 ... + 45
Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60

PACKAGING INFORMATION

EAN	4250716933475
Article no.	100988
Customs tariff number	94054099

BLRGB PLUS

BILTONFOCUSED
ON
LINEAR
LIGHT**BLCOL0300024DC07254RGB000C05**

Article no.: 100988

Length [mm]	5000.0
Gross weight [g]	225.0
Gross height [mm]	18.0
Gross width [mm]	200.0
Gross length [mm]	200.0
State of origin	AT

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.biltongroup.com

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.biltongroup.com