


Direct connector

BLCONX00000502

Article no.: 170150

BILTON

FOCUSED
ON
LINEAR
LIGHT

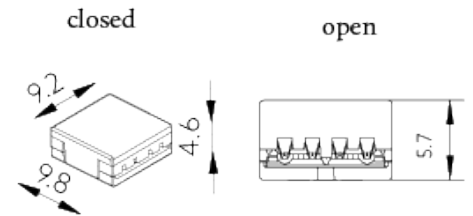

Number of plug-in contacts



Net width



Net height



Net length

TENDER TEXT

BL DirectConnector 2-/4pole 5A V2 BILTON LEDON TechnologyDirect connector 2 pole Artikel 170150 The connector is a2 pole Direct connector with Flat ribbon cable . The connector has a IP20 protection class and the assembly takes place . Max. Rated current 5 A. Dimensions (L x W x H): 9.2 mm x 9.8 mm x 5.7 mm



Direct connector

BLCONX00000502

Article no.: 170150

MECHANICAL DATA

Net width [mm]	9.8
Net height [mm]	5.7
Net length [mm]	9.2
Degree of protection (IP), mounted	IP20
Colour	White
Net weight [g]	4
Number of plug-in contacts	2
Connectable conductor cross section fine-strand w/o ferrule [mm ²]	0,34

ELECTRICAL DATA

Rated current I _n [A]	5
Rated voltage [V]	25
Rated surge voltage [kV]	0.5

TEMPERATURE TECHNICAL DATA

Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at T _c [°C]	- 30... + 75
Inflammability class of insulation material acc. with UL94	V0

PACKAGING INFORMATION

EAN	4250716919325
Article no.	170150
Customs tariff number	85444290
Gross weight [g]	4.0
Gross height [mm]	5.7
Gross width [mm]	9.8
Gross length [mm]	9.2
State of origin	PL

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.biltongroup.com

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.biltongroup.com