
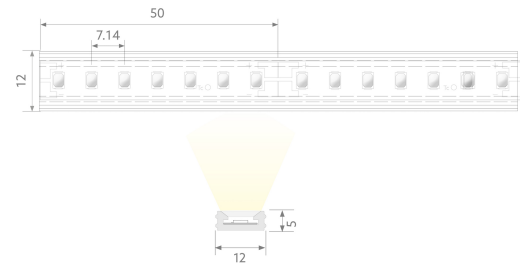


# BLAIR SLIM 600 IP54

BL AIR Slim LED tube 600lm/m 24VDC 8.8W/m IP54 927 5m satinised

Article no.: 101900

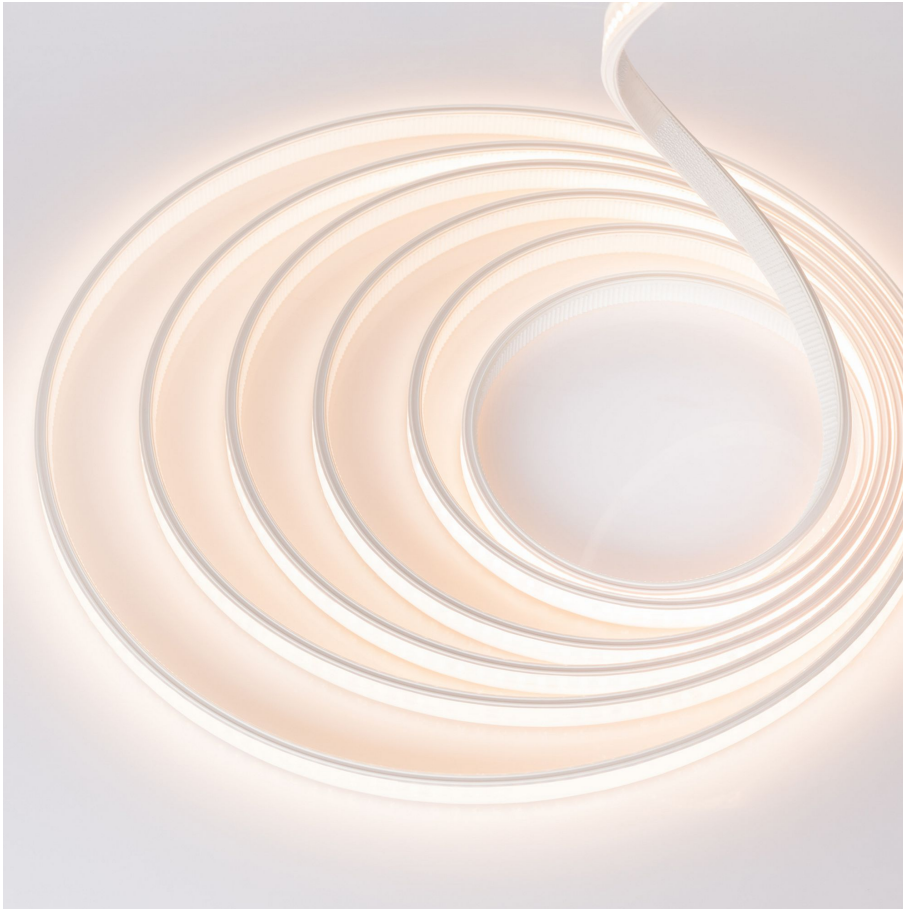

IP54

Degree of protection (IP)

600  
lm

Luminous flux per meter

5000.0  
mm

Max. length

## TENDER TEXT

AIR Slim LED light tube, LED strip in satinised silicone sheath, 600 lm/m, wave-shaped bend to light emission surface, cable connection on one side, cable outlet at bottom, 24VDC 8.8W/m IP54 CRI>90 2700K WHITE, W 12mm x H 5mm x L 5000mm LED module BLAIR SLIM 600 IP54 Article 101900 Linear LED light strip on a flexible circuit board. Installation via Self-adhesive tape on the back using and appropriate mounting accessories in conjunction with Plug-&-Play connection system. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 50000 h. The BLAIR SLIM 600 IP54 LED-strip has a luminous flux of 600 lm at 8.8 W, resulting in an efficiency of 68 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 5000.0 mm can be achieved. In terms of lighting, the module has a colour temperature of 2700 K and a beam angle of 120°. All this with a colour rendering index of >90 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 7.14 mm. Degree of protection IP54 Smallest possible bending radius 200 mm Dimension (L x W x H): 5020.0 mm x 12.0 mm x 5.0 mm

## TOP-FEATURES

- //\_ IP54 protection in highly flexible silicone sheath
- //\_ Self-adhesive tape on the back for easy installation
- //\_ Extremely thin construction (width x height) 12.0 mm x 5.0 mm for subtle lines of light
- //\_ With lateral clamping knobs ideal for groove mounting in milled areas

# BLAIR SLIM 600 IP54

**BILTON**

FOCUSED  
ON  
LINEAR  
LIGHT

**BL AIR Slim LED tube 600lm/m 24VDC 8.8W/m IP54 927 5m satinised**

Article no.: 101900



# BLAIR SLIM 600 IP54

BL AIR Slim LED tube 600lm/m 24VDC 8.8W/m IP54 927 5m satinised

Article no.: 101900

## MECHANICAL DATA

Net width [mm]	12.0
Net height [mm]	5.0
Net length [mm]	5020.0
Degree of protection (IP)	IP54
Colour	White
Net weight [g]	265
Distance [mm]	7.14
Distance relating to	LED to LED
Length of particular segments [mm]	50.0

## ELECTRICAL DATA

Overall efficiency [lm/W]	68
Lamp power per meter [W]	8.8
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Voltage type	DC
Protection class	III

## LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	600
Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>90
Colour temperature [K]	2700

## CONNECTION

Number of poles	2
Conductor cross section [mm <sup>2</sup> ]	0.50
Max. length [mm]	5000.0

## TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	50000
Ambient temperature during operating [°C]	- 20 ... + 45
Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60

## PACKAGING INFORMATION

EAN	4250716937824
Article no.	101900

# BLAIR SLIM 600 IP54

**BL AIR Slim LED tube 600lm/m 24VDC 8.8W/m IP54 927 5m satinised**

Article no.: 101900

Customs tariff number	94054039
Length [mm]	5020.0
Gross weight [g]	385.0
Gross height [mm]	27.0
Gross width [mm]	330.0
Gross length [mm]	330.0
State of origin	AT

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.biltongroup.com](http://www.biltongroup.com)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.biltongroup.com](http://www.biltongroup.com)