


BL AIR TOP 450

BILTON
FOCUSED
ON
LINEAR
LIGHT

BL AIR Top LED lighth tube 450lm/m 24VDC 7.2W/m IP67 840 5m

Article no.: 102110

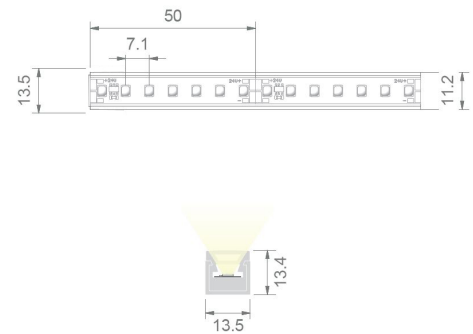

24
V

Lamp voltage

450
lm

Luminous flux per meter

5010.0
mm

Max. length

>80

Colour rendering index CRI

TENDER TEXT

AIR TOP LED lighth tube, LED strip in silicone sheath, 450 lm/m, wave-shaped bend to light emission surface, cable connection on one side, cable outlet at bottom, 24VDC 7.2W/m IP67 CRI>80 4000K WHITE 5m LED module BL AIR TOP 450 Article 102110 Linear LED light strip on a flexible circuit board. Installation using appropriate mounting accessories in conjunction with Plug-&-Play connection system. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +55 °C at a service life of 50000 h . At an ambient temperature of 85°C, a lifetime of 50,000 hours can still be guaranteed. Up to 95°C the lifetime is 30,000 hours and at temperatures of 100°C still 16,000 hours (> L70B50). The BL AIR TOP 450 LED-strip has a luminous flux of 450 lm at 7.2 W, resulting in an efficiency of 63 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 5010.0 mm can be achieved. In terms of lighting, the module has a colour temperature of 4000 K and a beam angle of 120°. All this with a colour rendering index of >80 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 7.14 mm. Degree of protection IP67 Smallest possible bending radius 200 mm Dimension (L x W x H): 5010.0 mm x 13.2 mm x 12.0 mm

TOP-FEATURES

//__ Homogeneously luminous light line without visible light points

//__ IP67 -protection in highly flexible silicone jacket

//__

UL certified

//__ New connection: the end caps close straight to the profile

BL AIR TOP 450

BL AIR Top LED lighth tube 450lm/m 24VDC 7.2W/m IP67 840 5m
Article no.: 102110



24 V	>80	IP67	4000 K
------	-----	------	--------

BL AIR TOP 450

BL AIR Top LED lighth tube 450lm/m 24VDC 7.2W/m IP67 840 5m

Article no.: 102110

MECHANICAL DATA

Net width [mm]	13.2
Net height [mm]	12.0
Net length [mm]	5010.0
Degree of protection (IP)	IP67
Colour	White
Distance [mm]	7.14
Distance relating to	LED to LED
Length of particular segments [mm]	50.0

ELECTRICAL DATA

Overall efficiency [lm/W]	63
Lamp power per meter [W]	7.2
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Voltage type	DC
Protection class	III

LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	450
Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>80
Colour temperature [K]	4000

CONNECTION

Number of poles	2
Conductor cross section [mm²]	0.50
Max. length [mm]	5010.0

TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	50000
Ambient temperature during operating [°C]	- 20 ... + 55
Ambient/storage temperature [°C]	- 20 ... + 55

PACKAGING INFORMATION

Article no.	102110
Customs tariff number	94054039
Length [mm]	5010.0
Gross weight [g]	0.6

BL AIR TOP 450

BL AIR Top LED lighth tube 450lm/m 24VDC 7.2W/m IP67 840 5m

Article no.: 102110

Gross height [mm]	27.0
Gross width [mm]	330.0
Gross length [mm]	330.0
State of origin	AT

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.biltongroup.com

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.biltongroup.com