



# BL Skyline 12m

**BILTON**FOCUSED  
ON  
LINEAR  
LIGHT**BL COR Skyline LED light system 890lm/m 24VDC 8.7W/m IP20 930 12m black**

Article no.: 171665

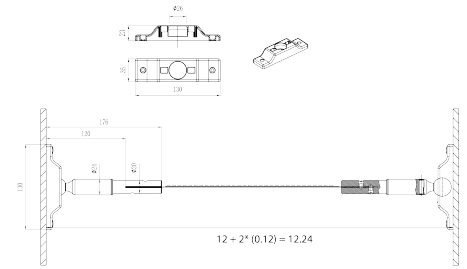

Length



Colour housing



Lamp type



Lichtaustritt

## TENDER TEXT

Skyline black LED lighting system with LED strip 890 lm/m and mounting material 24VDC 8.7W/m 102lm/W IP20 CRI>90 3000K WHITE Colours and BLT label 12 metres LED Module BL Skyline 12m Item 171665 Linear LED strip light on steel tape with movable mounting modules and cable for easy assembly and quick installation. Suitable for ambient temperatures of with a lifetime of . The BL Skyline 12m LED strip light has a luminous flux of with a power of , giving an efficiency of 102 lm/W. With a nominal voltage of DC at the connection, a maximum module length of can be achieved. In terms of lighting, the module has a color temperature of 3000 K and a beam angle of 120°. All with a color rendering index of >90 and a binning selection according to (MacAdams). The light strip can be divided every 50.0 mm, resulting in an LED spacing of 8.33 mm. Protection class IP20 Dimensions (L x W x H): 12000.0 mm x 35.0 mm x



# BL Skyline 12m

**BL COR Skyline LED light system 890lm/m 24VDC 8.7W/m IP20 930 12m black**

Article no.: 171665

## MECHANICAL DATA

Net width [mm]	35.0
Net height [mm]	130.0
Net length [mm]	12000.0
Degree of protection (IP)	IP20
Distance [mm]	8.33
Distance relating to	LED to LED
Length of particular segments [mm]	50.0

## ELECTRICAL DATA

Overall efficiency [lm/W]	102
Voltage type	DC
Protection class	III

## LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour rendering index CRI	>90
Colour temperature [K]	3000
Energy efficiency class provided exchangeable built-in lamp	G

## PACKAGING INFORMATION

EAN	425071694510
Article no.	171665
Length [mm]	12000.0
Gross weight [g]	2520.0
Gross height [mm]	70.0
Gross width [mm]	346.0
Gross length [mm]	352.0
State of origin	CN

\* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of +/- 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.biltongroup.com](http://www.biltongroup.com)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.biltongroup.com](http://www.biltongroup.com)