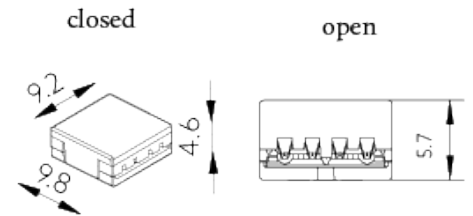


Direct connector

BILTONFOCUSED
ON
LINEAR
LIGHT**BL LED connector 2-/4-pole 5A for coloured LED strip 8mm wide**

Article no.: 170150

**2**Number of plug-in
contacts**7.0**
mm

Net width

6.0
mm

Net height

8.0
mm

Net length

TENDER TEXT

LED strip connector. 2-/4-pin for single-colour and coloured LED strips with 8mm width. 2-pin: 5A per pin; 4-pin: 5A pin 1 and 1.67A each pin 2-4. BILTON LEDON Technology Direct connector 2 pole Artikel 170150 The connector is a 2 pole Direct connector with Flat ribbon cable. The connector has a IP20 protection class and the assembly takes place. Max. Rated current 5 A. Dimensions (L x W x H): 8,0 mm x 7,0 mm x 6,0 mm



Direct connector

BL LED connector 2-/4-pole 5A for coloured LED strip 8mm wide

Article no.: 170150

MECHANICAL DATA

Net width [mm]	7.0
Net height [mm]	6.0
Net length [mm]	8.0
Degree of protection (IP), mounted	IP20
Colour	White
Net weight [g]	0.3
Number of plug-in contacts	2
Connectable conductor cross section fine-strand w/o ferrule [mm ²]	0,34

ELECTRICAL DATA

Rated current I _n [A]	5
Rated voltage [V]	25
Rated surge voltage [kV]	0.5

TEMPERATURE TECHNICAL DATA

Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at T _c [°C]	- 30... + 75
Inflammability class of insulation material acc. with UL94	V0

PACKAGING INFORMATION

EAN	4250716919325
Article no.	170150
Customs tariff number	85444290
Gross weight [g]	52.0
Gross height [mm]	45.0
Gross width [mm]	120.0
Gross length [mm]	140.0
State of origin	PL

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.biltongroup.com

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.biltongroup.com