


BLTWS 1300 >80

BILTONFOCUSED
ON
LINEAR
LIGHT**BL ONE Comfort TW LED strip 1300lm/m 24VDC 9.9W/m IPX6 827-865 5.025m**

Article no.: 102093

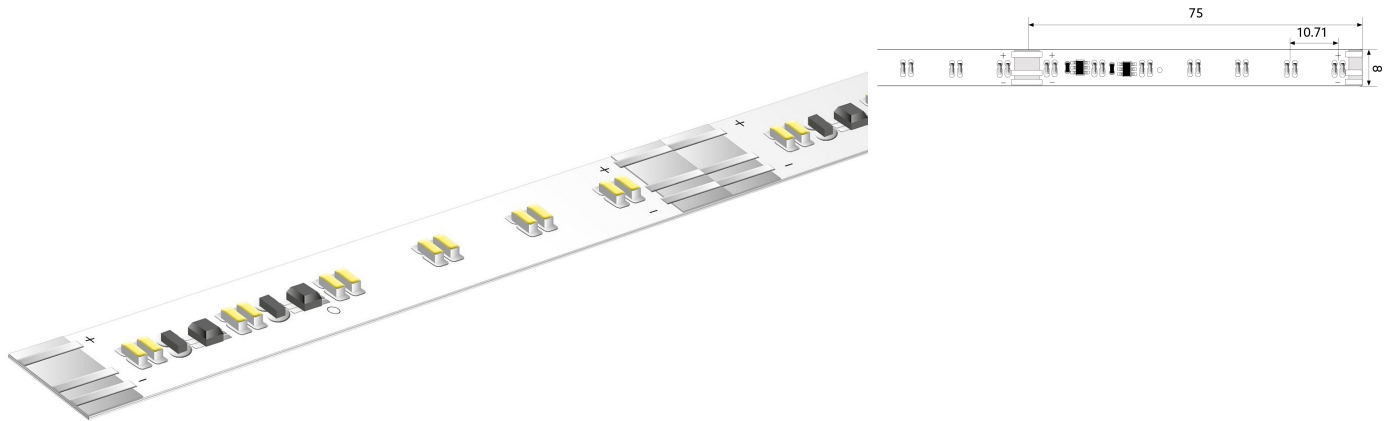

Lamp voltage



Length of particular segments



Colour temperature



Max. length

TENDER TEXT

LED strip ONE Comfort TW 1300 lm/m 24VDC, 9.9 W/m, 131 lm/W, IPX6, CRI>80, 2-layer flex, colour change 2700 - 6500 K, tuneablewhite, 500 mm connection cable on both sides, 5.025 metres LED module BLTWS 1300 >80 Article 102093 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 60000 h. The BLTWS 1300 >80 LED-strip has a luminous flux of 1300 lm at 9.9 W, resulting in an efficiency of 131 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 10500.0 mm can be achieved. In terms of lighting, the module has a colour temperature of 2700 - 6500 K and a beam angle of 120°. All this with a colour rendering index of >80 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 75.0 mm, resulting in a LED distance of 10.70 mm. Degree of protection IPX6 Dimension (L x W x H): 5025.0 mm x 8.0 mm x 1.5 mm

TOP-FEATURES

- //_ BILTON TW is the name for Tuneable White
- //_ With this series becomes a physiologically valuable light (= Human Centric Lighting) generated
- //_ Long cable lengths and better stability through double layers
- //_ Continuously dimming between 2700 - 6500 K


BLTWS 1300 >80

BILTON

FOCUSED
ON
LINEAR
LIGHT

BL ONE Comfort TW LED strip 1300lm/m 24VDC 9.9W/m IPX6 827-865 5.025m

Article no.: 102093



BLTWS 1300 >80

BL ONE Comfort TW LED strip 1300lm/m 24VDC 9.9W/m IPX6 827-865 5.025m

Article no.: 102093

MECHANICAL DATA

Net width [mm]	8.0
Net height [mm]	1.5
Net length [mm]	5025.0
Degree of protection (IP)	IPX6
Colour	White
Net weight [g]	90
Distance [mm]	10.70
Distance relating to	LED to LED
Length of particular segments [mm]	75.0

ELECTRICAL DATA

Overall efficiency [lm/W]	131
Lamp power per meter [W]	9.9
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Voltage type	DC
Protection class	III

LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	1300
Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>80
Colour temperature [K]	2700 - 6500
Energy efficiency class provided exchangeable built-in lamp	E

CONNECTION

Number of poles	3
Conductor cross section [mm ²]	0.50
Max. length [mm]	10500.0

TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	60000
Ambient temperature during operating [°C]	- 20 ... + 45
Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60

PACKAGING INFORMATION

EAN	4250716941999
-----	---------------

BL ONE Comfort TW LED strip 1300lm/m 24VDC 9.9W/m IPX6 827-865 5.025m

Article no.: 102093

Article no.	102093
Customs tariff number	94054099
Length [mm]	5025.0
Gross weight [g]	185.5
Gross height [mm]	18.0
Gross width [mm]	200.0
Gross length [mm]	200.0
State of origin	AT

* Specifications of the electrical and photometric parameters: All values are valid in the thermally steady state at 25 °C ambient temperature under the standardized measuring environment of BILTON. Nominal lumen values differ for different light colors, these values can be found in the respective data sheets. All values can have tolerances of +/- 15 %.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.biltongroup.com

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.biltongroup.com