



# BLRET 3000

**BILTON**FOCUSED  
ON  
LINEAR  
LIGHT**BL ONE Select Retail LED strip 2770lm/m 24VDC 27.7W/m IPX6 935 5m**

Article no.: 101846

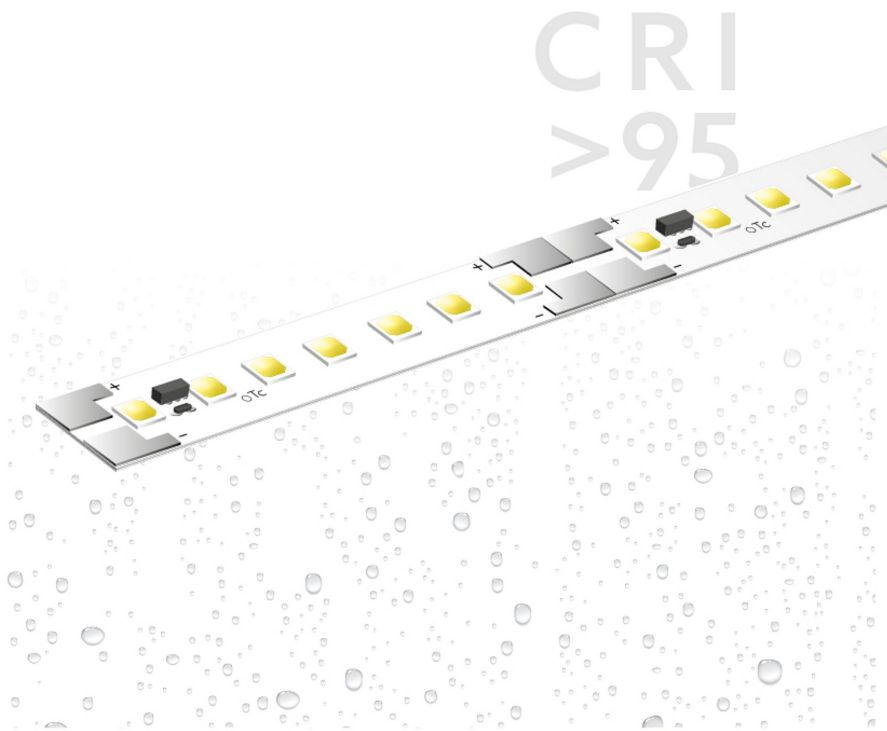

Lamp voltage



Luminous flux per meter



Max. length



Colour rendering index CRI

## TENDER TEXT

LED strip ONE Select Retail 2770 lm/m 24VDC, 27.7W/m, 100 lm/W, IPX6, CRI>95, 3500K, WHITE, connection cable 500 mm on both sides, 5 metres LED module BLRET 3000 Article 101846 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 60000 h. The BLRET 3000 LED-strip has a luminous flux of 2770 lm at 27.7 W, resulting in an efficiency of 100 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 4500.0 mm can be achieved. In terms of lighting, the module has a colour temperature of 3500 K and a beam angle of 120°. All this with a colour rendering index of >95 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 7.14 mm. Degree of protection IPX6 Dimension (L x W x H): 5000.0 mm x 8.0 mm x 1.5 mm

## TOP-FEATURES

- //\_ Best light quality for shop lighting thanks to CRI >95
- //\_ Long line lengths and better stability due to double layer
- //\_ Wide choice of light colors and lumen packages
- //\_ Available in Degree of Protection IPX6
- //\_ UL certification available



# BLRET 3000

**BL ONE Select Retail LED strip 2770lm/m 24VDC 27.7W/m IPX6 935 5m**

Article no.: 101846

## MECHANICAL DATA

Net width [mm]	8.0
Net height [mm]	1.5
Net length [mm]	5000.0
Degree of protection (IP)	IPX6
Colour	White
Distance [mm]	7.14
Distance relating to	LED to LED
Length of particular segments [mm]	50.0

## ELECTRICAL DATA

Overall efficiency [lm/W]	100
Lamp power per meter [W]	27.7
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Voltage type	DC
Protection class	III

## LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	2770
Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>95
Colour temperature [K]	3500
Energy efficiency class provided exchangeable built-in lamp	F

## CONNECTION

Number of poles	2
Conductor cross section [mm <sup>2</sup> ]	0.50
Max. length [mm]	4500.0

## TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	60000
Ambient temperature during operating [°C]	- 20 ... + 45
Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60

## PACKAGING INFORMATION

EAN	4250716936018
Article no.	101846

# BLRET 3000

**BL ONE Select Retail LED strip 2770lm/m 24VDC 27.7W/m IPX6 935 5m**

Article no.: 101846

Customs tariff number	94054099
Length [mm]	5000.0
Gross weight [g]	0.0
Gross height [mm]	18.0
Gross width [mm]	200.0
Gross length [mm]	200.0
State of origin	AT

\* Specifications of the electrical and photometric parameters: All values are valid in the thermally steady state at 25 ° C ambient temperature under the standardized measuring environment of BILTON. Nominal lumen values differ for different light colors, these values can be found in the respective data sheets. All values can have tolerances of +/- 15 %.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.biltongroup.com](http://www.biltongroup.com)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.biltongroup.com](http://www.biltongroup.com)