


# SafeLight 1500

SafeLight LED strip, 4000K, 1500lm/m, IP65, 25m

Article no.: 171567

**BILTON**

FOCUSED  
ON  
LINEAR  
LIGHT

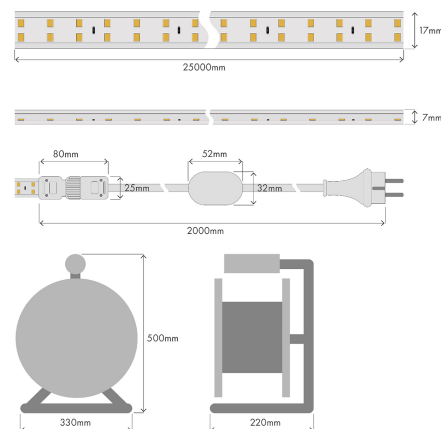

## TENDER TEXT

230VAC, 144 LED/m, 25m Rolle 25 m LED strip on practical cable drum; can be interconnected up to 150 m; fluorescent LED strip helps with orientation even in the event of a power failure; supply voltage 230V; 300 W - 12 W/m, 1500 lm/m; IP65 protection class; colour temperature 4000 K; beam angle 120°; dimmable; -25 to +45°C; weight 7 kg; dimensions 18 x 8 mm

## TOP-FEATURES

- //\_ 25 m LED tape on practical cable drum for highly visible lighting
- //\_ Connectable up to 150 m long
- //\_ Fluorescent LED tape helps with orientation even in the event of a power failure
- //\_ 300 W, 12 W/m Dimmable lighting solution
- //\_ Extremely homogeneous illumination over the entire length Space-saving and flexible
- //\_ With IP65 protection class well suited for entire length
- //\_ Space-saving and flexible
- //\_ Well-suited for indoor and outdoor applications thanks to IP65 protection class
- indoor and outdoor applications

>80

230 V

IP65

4000 K

# SafeLight 1500

**BILTON**FOCUSED  
ON  
LINEAR  
LIGHT**SafeLight LED strip, 4000K, 1500lm/m, IP65, 25m**

Article no.: 171567

## MECHANICAL DATA

Degree of protection (IP)	IP65
Net weight [g]	7000
Length of particular segments [mm]	25000.0

## ELECTRICAL DATA

Lamp power per meter [W]	12.0
Lamp voltage [V]	230
Voltage type	AC
Protection class	II

## LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	1500
Beam angle [°]	120
Colour rendering index CRI	>80
Colour temperature [K]	4000

## CONNECTION

Number of poles	2
Max. length [mm]	150000.0

## TEMPERATURE TECHNICAL DATA

Rated life time L70/B50 at 25 °C [h]	30000
Ambient temperature during operating [°C]	- 25 ... + 45

## PACKAGING INFORMATION

Article no.	171567
Customs tariff number	94059900
Length [mm]	25000.0
Gross weight [g]	7000.0
State of origin	CN

\* Data of the electrical and photometric measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values may have a tolerance value of -/+ 10 % (or -/+ 15 % for ECO / TWO / RGB / AIR). Module length at 24 V input voltage at the module and luminous flux drop 10 % over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.biltongroup.com](http://www.biltongroup.com)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.biltongroup.com](http://www.biltongroup.com)