
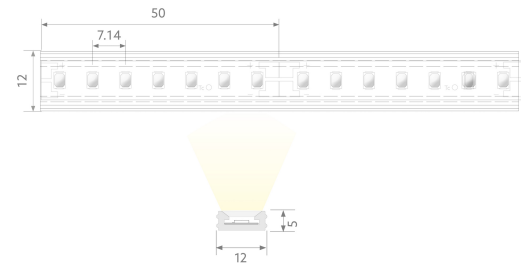


BLAIR SLIM 900 IP54

BLASS0900024DC12854927000W05

Article no.: 101902

BILTON
FOCUSED
ON
LINEAR
LIGHT

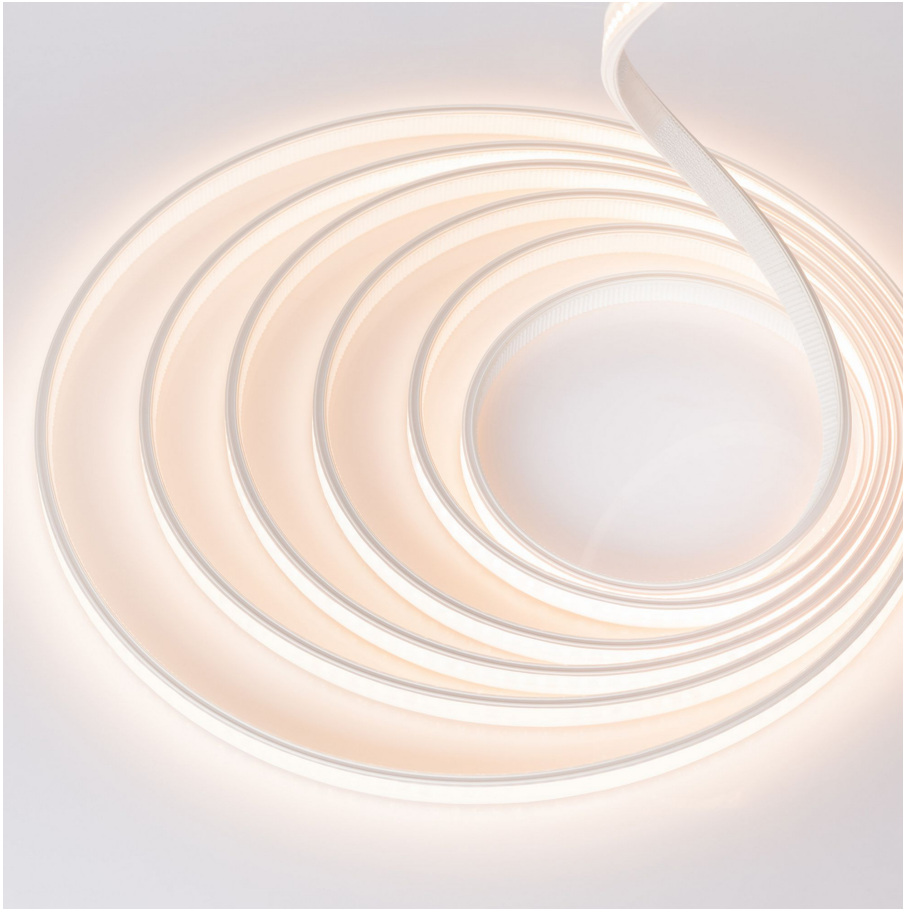

Degree of protection (IP)



Luminous flux per meter



Max. length

TENDER TEXT

BL AIRSLIM satiniert 900 LED strip 24VDC 12,8W/m IP54 CRI>90 2700K WHITE 5m LED module BLAIR SLIM 900 IP54 Article 101902 Linear LED light strip on a flexible circuit board. Installation via Self-adhesive tape on the backusing and appropriate mounting accessories in conjunction with Plug-&-Play connection system. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 50000 h . The BLAIR SLIM 900 IP54 LED-strip has a luminous flux of 900 lm at 12.8 W, resulting in an efficiency of 70 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 5000.0 mm can be achieved. In terms of lighting, the module has a colour temperature of 2700 K and a beam angle of 120°. All this with a colour rendering index of >90 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 7.14 mm. Degree of protection IP54 Smallest possible bending radius 200 mm Dimension (L x W x H): 5020.0 mm x 12.0 mm x 5.0 mm

TOP-FEATURES

- //_ IP54 protection in highly flexible silicone sheath
- //_ Self-adhesive tape on the back for easy installation
- //_ Extremely thin construction (width x height) 12.0 mm x 5.0 mm for subtle lines of light
- //_ With lateral clamping knobs ideal for groove mounting in milled areas



Version: 20240716 // Errors and printing errors are reserved.

© BILTON International GmbH, Gewerbepark Harham 2, 5760 Saalfelden, Austria // Phone: +43 6582 71164 // Mail: office@biltongroup.com // www.biltongroup.com

BLAIR SLIM 900 IP54

BLASS0900024DC12854927000W05

Article no.: 101902

MECHANICAL DATA

Net width [mm]	12.0
Net height [mm]	5.0
Net length [mm]	5020.0
Degree of protection (IP)	IP54
Colour	White
Net weight [g]	265
Distance [mm]	7.14
Distance relating to	LED to LED
Length of particular segments [mm]	50.0

ELECTRICAL DATA

Overall efficiency [lm/W]	70
Lamp power per meter [W]	12.8
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Voltage type	DC
Protection class	III

LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	900
Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>90
Colour temperature [K]	2700

CONNECTION

Number of poles	2
Conductor cross section [mm ²]	0.50
Max. length [mm]	5000.0

TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	50000
Ambient temperature during operating [°C]	- 20 ... + 45
Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60

PACKAGING INFORMATION

EAN	4250716937848
Article no.	101902

BLAIR SLIM 900 IP54

BILTONFOCUSED
ON
LINEAR
LIGHT**BLASS0900024DC12854927000W05**

Article no.: 101902

Customs tariff number	94054039
Length [mm]	5020.0
Gross weight [g]	385.0
Gross height [mm]	27.0
Gross width [mm]	330.0
Gross length [mm]	330.0
State of origin	AT

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.biltongroup.com

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.biltongroup.com